



Cut Edge Protection

Cut Edge Protection

PROTECTION FROM CUT EDGE CORROSION

What does it do?

One of the most common problems in metal profile sheeting on modern buildings is cut edge corrosion. Over time the corrosion degrades the sheets which results in the breakdown of the factory protective finish.

SCL Cut Edge Protection is the recommended treatment procedure for edge protection of factory pre-coated cladding sheets using **SCL A/P Primer (for heavy corrosion use SCL Anti-Corrosion Primer)**, **SCL Duratape** and **SCL 90 Durathane High Build**.

System benefits

- Cold liquid applied – no hot works
- Can be used over most Pitched Roof types
- Safe and easy to use
- Quickly resistant to rainfall
- Flexible
- Joint free
- Excellent film strength
- UV stable
- Easy to maintain and excellent through life costings

Build up of system

SCL A/P Primer Apply **SCL A/P Primer** at approximately 6m²/litre, ensuring good edge cover and overlapping 10-20mm onto the firm edge. Allow to dry for at least 8 hours before overcoating

OR


SCL Anti-Corrosion Primer Apply **SCL Anti-Corrosion Primer** at approximately 5m²/litre, ensuring good edge cover and overlapping 10-20mm onto the firm edge. Allow to dry for at least 8 hours before overcoating

SCL Duratape At overlaps use **SCL Duratape** to bridge joints

Finish Coat Apply one coat of **SCL 90 Durathane High Build** at approximately 1m²/litre. Ensure good edge cover, working well into overlaps.



Step 1

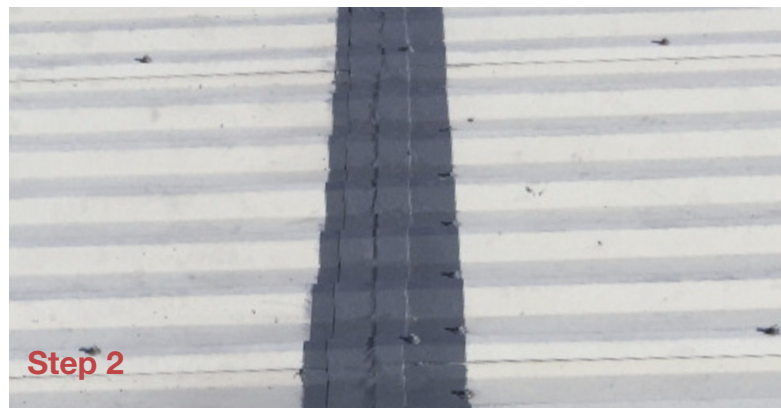

Step 2



Step 3

Technical support

If you would like any information on SCL products please call: 01384 413815 or email us at: sales@seamlesscoatings.co.uk

Disclaimer

The information contained herein is to the best of our knowledge true and accurate and is given in good faith, but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Seamless Coatings be liable for consequential or incidental damages.

Seamless Coatings Ltd

Unit 18, Oak Street Industrial Estate, Cradley Heath, West Midlands B64 5JY Office: 01384 413815 Fax: 01384 413830

www.seamlesscoatings.co.uk